

Technical Specifications

HKM-04 Specifications	
Input HDMI F Connector	4
Output HDMI F connector	1
Selection Method	Front Push Button & IR
Bandwidth	2.25Gbps
Transmission Max.	15 meters
EX. Power adaptor	DC 5V 1A
Housing	Metal
Dimensions (mm)	171(L)x75.5(W)x46.5(H)
Product Weight (Kg)	16pcs/CTN 7.8 KGS/CTN
Console side	USB A Type x2, MIC Dia 3.5 phone Jack x1
PC side	USB B Type x4, MIC Dia 3.5 phone Jack x4

USB Function

Overview

The high speed usb hub is compliant with the High speed USB specifications. It provides easy Plug-n-Play USB expansion. Just like the USB 1.1 you can connect as many as 127 devices to your computer using multiple USB2.0 hubs. All ports are fully supported for compatibility with USB peripherals.

© Copyright 2008 Smart-AVI, All Rights Reserved

Notice

The information contained in this document is subject to change without notice. Smart-AVI makes no warranty of any kind with regard to this material, including but not limited to, implied warranties of merchantability and fitness for any particular purpose.

Smart-AVI will not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance or use of this material.

No part of this document may be photocopied, reproduced or translated into another language with out prior written consent from Smart-AVI.

Smart-AVI
SMART AUDIO VIDEO INNOVATION

User Manual

HKM-04 HDMI-USB-KVM Switch



Share One HD Monitor/USB 2.0 and/or Stereo Audio Devices Between Four Computers

Smart-AVI
2840 N. Naomi Ave.
Burbank, California 91504
Phone: (818) 565-0011
Facsimile: (818) 565-0020

www.smartavi.com

Introduction

This switcher is HDMI V1.3 Compliant and supports up to 36-bit Deep Color, Dolby True-HD or DTS HD Audio formats. IR Remote can fully select input for output independently, or push button on Front panel can do the same.


The especially recommended 4x1 HDMI USB KVM switch allows up to four HDMI source devices to be independently switched to two HDMI compatible monitor, HDTV's and/or projector.

Features

- Supports USB 2.0
- Plug and Play
- Compact, Light-Weight Unit for Easy Integration
- Designed for PC or Mac
- Supports Stereo Audio Signals
- Maintains Resolutions of 480p, 720p, 1080i and 1080p
- LED Indicator Lights on Front Panel
- Infrared Control



Remote

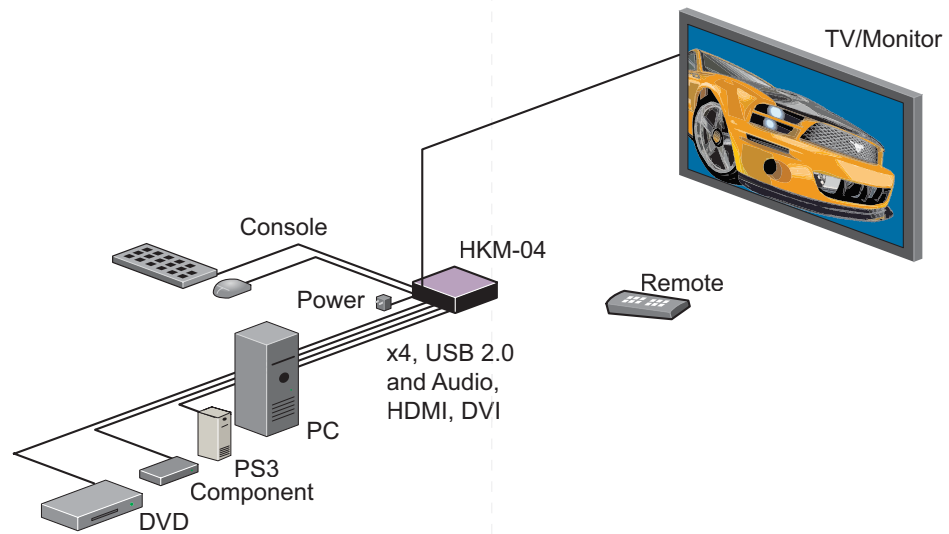


What's in the box?

HKM-04

Please check the contents of the package before beginning installation.

Qty	Description	Part Number
1	4HDMI/USB/Audio switch	HKM-04
1	Power Adaptor	PS5VDC 1A

Connection Diagram

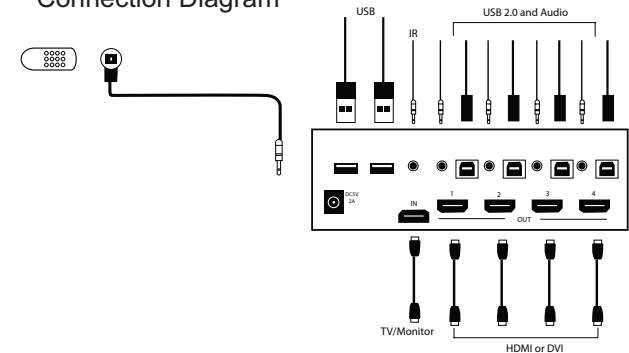

Installation and Operation

Connecting the Converter

1. Connect the HKM-04 to the TV/Monitor with HDMI cable.
2. Connect HKM-04 to the computer using HDMI, USB and Audio cables.
3. Connect Power Supply.
4. Turn ON all the PC's.

Channel Selection

You can select the channels you want to access in two ways. Front panel push button selection and remote control included with the package content.

FRONT PANEL PUSH BUTTON SELECTION

The front panel push button is used to select which channel is currently displayed on the HDTV. Pressing the button during normal operation will cause next channel to be selected.

REMOTE CONTROL SELECTION (IR)

The channel can also be selected through the attached remote. Push the IR code button on the remote control panel for 2 seconds.