

HKM-04

HDMI-USB-KVM SWITCH




Share One HD Monitor/USB 2.0 and/or Stereo Audio Devices Between Four Computers

Using SmartAVI's HKM-04, users may now connect up to four computers or any devices using a HD Monitor (1080p), USB 2.0 and Audio display. Perfect for PC and Mac systems and multi-media displays.

Features

- Supports USB 2.0
- Plug and Play
- Compact, Light-Weight Unit for Easy Integration
- Designed for PC or Mac
- Supports Stereo Audio Signals
- Maintains Resolutions of 480p, 720p, 1080i and 1080p
- LED Indicator Lights on Front Panel
- Infrared Control

Application Diagram

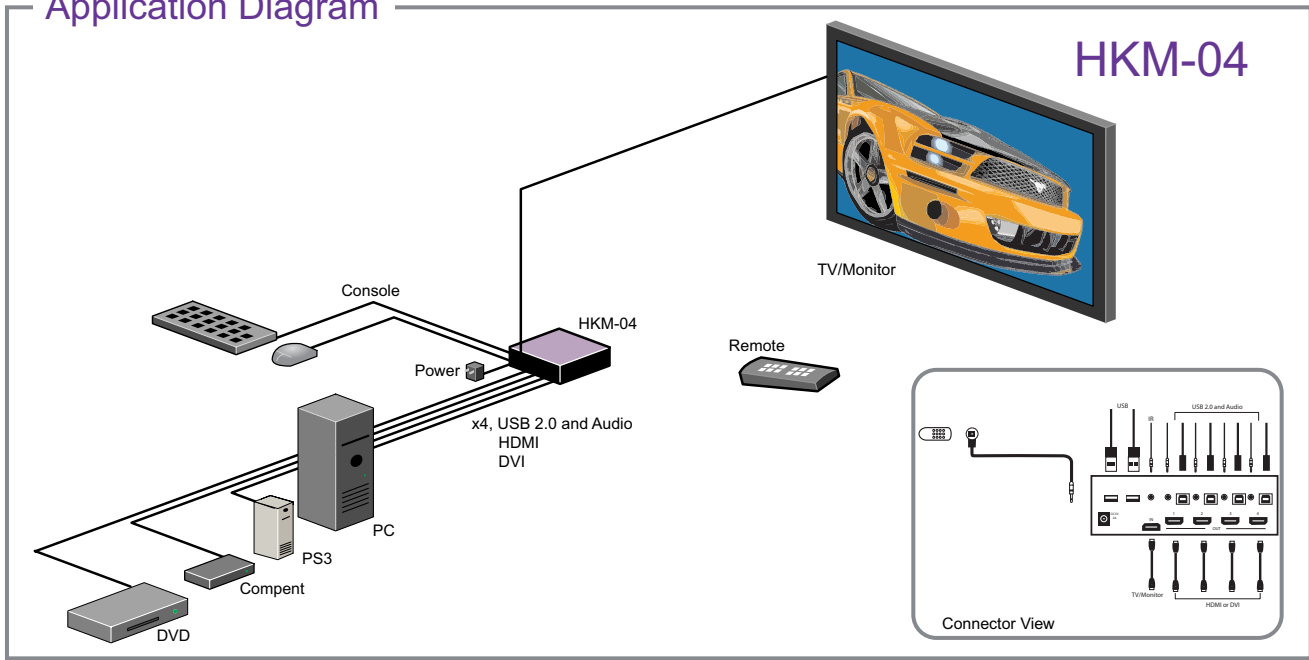

Specifications

Input HDMI F connector:	4
Output HDMI F Connector:	1
Selection Method:	Front Push Button, IR Remote
Bandwidth:	2.25 Gbps
Total Transmission Max:	15 meters
EX.Power adaptor:	DC 5V 1A
Housing:	Metal
Dimension(mm):	171(L)×75.5(W) x46.5(H)
Product Weight(Kg):	16pcs/CTN 7.8KGS/CTN
Console side:	USB A Type X 2, MIC Ø3.5 Phone Jacks X 1
PC side:	USB B Type X 4, MIC Ø3.5 Phone Jacks X 4

Applications

- Multimedia Presentations
- Corporate Board Presentation/Meeting
- Trade Show Booth
- Studio Workspace



Order Info

HKM-04S, system for 4HDMI/USB/Audio swich including HKM-04 and PS5VDC 1A

Many industry leaders have already embraced SmartAVI's advanced technology and have eagerly implemented our products throughout their organizations. Such companies include:



SmartAVI, Inc.
 2840 N. Naomi Ave. Burbank, CA 91504
 Tel: (818) 565-0011 Fax: (818) 565-0020
 smartavi.com